


unitronix
THE EMBEDDED EDGE

9-37 Currans Road, Cooranbong, NSW 2265
+61 (0)2 4977 3511
unisales@unitronix.com.au www.unitronix.com.au

Eagle

Embedded Processing Unit

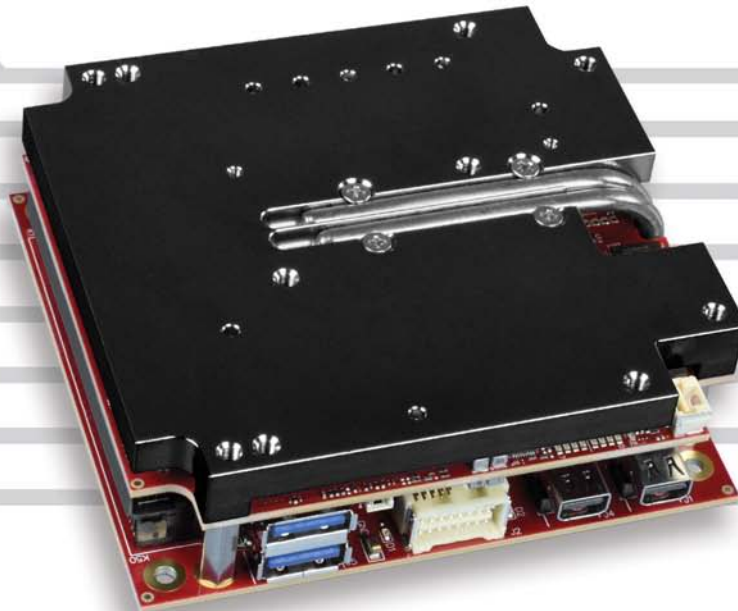

90 x 96 x 37 mm
(3.54 x 3.78 x 1.46")

Overview

The Eagle is a rugged board-level embedded computer that features a 6-core Xeon-E processor, soldered down high speed NVMe SSD storage, and error correcting RAM. It provides an ideal solution when high performance computing is required in extreme environments.

The Eagle is based on Intel®'s 9th Generation Xeon-E processor which features 6 cores and Hyper-Threading. In addition the Eagle includes high speed SSD storage (NVMe) and up to 32 GB of error-correcting RAM. This makes it ideal for high performance embedded computing needs in defense, aerospace, medical, smart security, and energy applications.

On-board I/O includes two USB 3.1 ports, four USB 2.0 ports, RS-232/422/485 serial ports, 8254 timer/counters. I2C support, and 8 digital I/O lines.

The Eagle's high performance comes with a compact 90 x 96 mm footprint. Its 37 mm height fits in most 1U enclosures.

On-board power conditioning supports nominal 12V input between 10V – 15VDC.

The Eagle, a member of the VersaLogic EPU product family, is designed and tested for full industrial temperature (-40° to +85°C) operation and meets MIL-STD-202H specifications for shock and vibration. It uses latching connectors to address cable detachment issues in hostile environments.

VersaLogic's 10+ year product life support ensures long-term availability. Long lifecycle products avoid expensive upgrades, redesigns, and migrations that come from shorter lifecycle products.

Highlights

- **High Performance Processor**
6-core Xeon-E
- **High Speed On-board Storage**
128 Gb NVMe fast read/write SSD storage
- **Error-Correcting Memory**
Up to 32 GB of ECC RAM

Features

1 High-performance Video

Intel UHD Graphics P630 supports DirectX 12 and OpenGL 4.5, 4K hardware video acceleration with HEVC (10-bit), VP8, VP9, and MPEG2 encoding/decoding and VC-1 decoding. Two Mini DisplayPort outputs.

2 Network

Two Gigabit Ethernet (GbE) ports.

3 Storage

On-Board fast read/write bootable 128 GB NVMe SSD. Larger capacities available.

6 Gb/s SATA port supports bootable SATA hard drive. Dual-port option available.

4 Industrial I/O

Two USB 3.1 ports (4a) and four USB 2.0 ports (4b) support video cameras, keyboard, mouse, and other devices.

Two RS-232/422/485 serial ports (4c). Three 8254 timer/counters. I2C support (4d).

5 Digital I/O

Eight TTL I/O Lines 3.3V. Independently configurable.

6 On-board Power Conditioning

10V – 15VDC. input for standard 12V power sources.

7 Thermal Solution

Built-in heat plate supports direct attachment to a thermal bulkhead, or attachment to other thermal options (heat sink, heat pipe adaptor, etc).

Intel Xeon Processor (not shown)

Hex-core with 4.2 GHz turbo clock rate.

RAM (not shown)

Up to 32 GB ECC DDR4 RAM depending on model.

Trusted Platform Module (not shown)

On-board TPM 2.0 security chip can lock out unauthorized hardware and software access.

Compact Size

90 x 96 mm

Industrial Temperature Operation



-40° to +85°C operation for harsh environments.

MIL-STD-202H

Qualified for high shock/vibration environments.

Software Support

Compatible with a variety of popular x86 operating systems including Windows, Linux, and Windows Server.

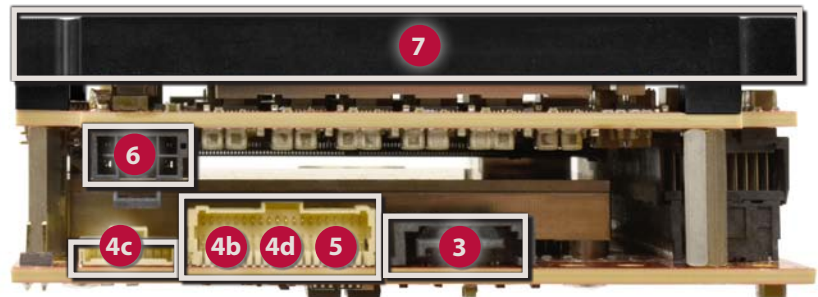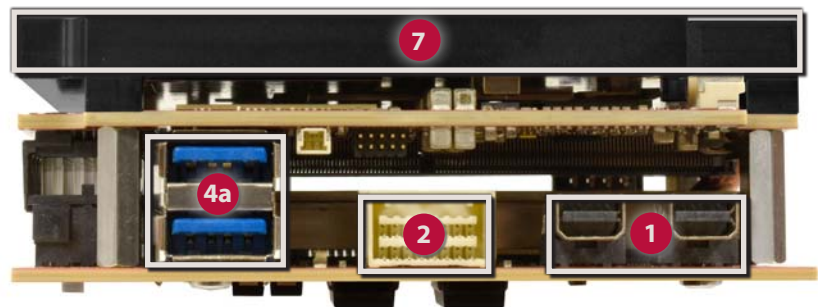

Modify Eagle to Your Exact Requirements

COTS modifications are available in quantities as low as 100 pieces.

- Conformal Coating
- Connector Changes
- I/O Changes
- Custom Testing
- Custom Labeling
- BGA Underfill
- BIOS Modifications
- Software and Drivers
- Revision Locks
- Custom Screening
- Storage Device Installation
- Software Pre-load
- Etc.

Specifications

| General | | | | |
|---|--|---------------------|--------------------------------|------------------------|
| Board Size | 90 x 96 x 37 mm (3.54 x 3.78 x 1.46"). PC104 format mounting points. | | | |
| Weight | 476 grams (16.8 oz.) | | | |
| Processor | Xeon E-2276ML 12 MB Cache, Intel 64-bit instructions, Secure Key, Intel Trusted Execution Technology, Intel Enhanced SpeedStep® Technology, Intel Turbo Boost Technology, Intel Virtualization Technology 2.0, AES New Instructions, Intel vPro®. | | | |
| Battery | Connection for 3.0V RTC backup battery | | | |
| Power Requirements (@ +12V) † | <i>Model</i> | <i>Idle</i> | <i>Average</i> | <i>Max.</i> |
| | VL-EPU-5120-EDP-16X | 4.2 W | 26.1 W | 48.0 W |
| | VL-EPU-5120-EDP-32X | 4.2 W | 26.7 W | 49.2 W |
| Input Voltage | 10V – 15VDC (nominal 12VDC) | | | |
| System Reset and Hardware Monitors | All voltage rails monitored. Watchdog timer with programmable timeout. Push-button sleep, reset, and power. | | | |
| Regulatory Compliance | RoHS (EU 2015/863), Conflict Minerals compliant. | | | |
| Bus Expansion | None | | | |
| Environmental | | | | |
| Thermal Management | Bolt-on heat plate standard. Optional heat sink, fan, and other thermal accessories available. | | | |
| Operating Temperature | <i>Model</i> | <i>Heat Plate**</i> | <i>Heat Pipe Adapter kit**</i> | <i>Heat Sink + Fan</i> |
| | All models | -40° to +85°C | -40° to +85°C | -40° to +60°C |
| | Ranges shown assume 90% CPU utilization. For detailed thermal information and exceptions, refer to the VL-EPU-5120 Reference Manual. ** Heat plate must be kept below 80°C | | | |
| Airflow Requirements | 0.5 linear m/s. | | | |
| Storage Temperature | -40° to +85°C | | | |
| Vibration, Sinusoidal Sweep □ | MIL-STD-202H method MIL-STD-202-204, Condition A: 2g | | | |
| Vibration, Random □ | MIL-STD-202H method MIL-STD-202-214, Condition A: 5.35g rms | | | |
| Mechanical Shock □ | MIL-STD-202H method MIL-STD-202-213, Condition G: 20g half-sine | | | |
| Security | | | | |
| TPM | Intel Trusted Platform Module 2.0 device | | | |

† Represents operation at +25°C and +12V supply running Windows 10 with DisplayPort display, GbE, and USB keyboard/mouse. Average power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization in Turbo mode.

◇ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

‡ TVS protected port (enhanced ESD protection)

§ Power pins on this port are overload protected

¥ Bootable storage device capability

□ MIL-STD-202H shock and vbe levels are used to illustrate the extreme ruggedness of this product in general. Testing at higher levels and/or different types of shock or vibration methods can be accommodated per the specific requirements of the application. Contact VersaLogic Sales for further information.

Specifications are subject to change without notification. Intel and Core are trademarks of Intel Corp. All other trademarks are the property of their respective owners.

| Memory | |
|------------------------------------|---|
| System RAM | 16 or 32 GB ECC DDR4 SDRAM |
| Video | |
| General | Integrated Intel UHD Graphics 630 supports DirectX 12 and OpenGL 4.5, Quick Sync Video, Clear Video HD Technology, 4K |
| Hardware Based Acceleration | Video acceleration with HEVC (10-bit), VP8, VP9, and MPEG2 encoding/decoding and VC-1 decoding |
| DisplayPort Interface § | Two Mini DisplayPort++ outputs. 24-bit. Up to 4096 x 2304 at 30 Hz. 4K support at 60 Hz. Supports DisplayPort and HDMI signaling (Video and Audio outputs). |

| Mass Storage | |
|-----------------------------|---|
| Rotating/SSD Drive ¥ | SATA 6 Gb/s port. Latching SATA connector. Optional dual port non-latching connector available. |
| Flash/SSD Drive ¥ | Soldered-down 128 GB NVMe SSD. Supports Data at Rest security functions. Larger capacities available. |

| Network Interface | |
|-------------------|--|
| Ethernet ‡ | Two AutoDetect 10BaseT/100BaseTX/1000BaseT ports. Latching connector. One port with network boot-option. |

| Device I/O | |
|-------------------------|---|
| USB ‡§ | Two USB 3.1 / 2.0 ports. Four USB 2.0 host ports. |
| COM Interface ‡ | Two RS-232/422/485 selectable. 16C550 compatible. 1 Mbps max. |
| Digital I/O | Eight TTL I/O Lines 3.3V. Independently configurable. |
| I2C | Single I2C interface |
| Counter / Timers | Three 8254 compatible Programmable Interval Timers (PITs). |

| Software | |
|--------------------------|---|
| BIOS | UEFI |
| Sleep Mode | ACPI 3.0. Support for S0, S3, S4, S5 states. |
| Operating Systems | Compatible with most x86 operating systems including Windows, Linux, and Windows Server |

Ordering Information

Call VersaLogic Sales at (503) 747-2261 for more information!

| Model | Processor | Cores | Hyper-Threading / Threads | CPU Clock / Turbo Speed | Graphics Core | On-board Storage | Memory | Operating Temp.† | Cooling |
|--------------------|---------------|-------|---------------------------|-------------------------|---------------|------------------|-----------|------------------|------------|
| VL-EPU-5120EDP-16X | Xeon-E-2276ML | 6 | Yes / 12 | 2.0 GHz / 4.2 GHz | UHD P630 | 128 GB NVMe SSD | 16 GB ECC | -40° to +85°C | Heat Plate |
| VL-EPU-5120EDP-32X | Xeon-E-2276ML | 6 | Yes / 12 | 2.0 GHz / 4.2 GHz | UHD P630 | 128 GB NVMe SSD | 32 GB ECC | -40° to +85°C | Heat Plate |

† Final operating temperature is dependent on the customer thermal solution

Accessories

| Part Number | Description |
|----------------------------|--|
| Cable Kit | |
| VL-CKR-EAGLE | Eagle evaluation cable kit. Includes VL-CBR-4005, 0812, 1604, 0702, 2033, 1014, 0818, HDW-105 and 401. |
| VL-CBR-4005 | System I/O paddleboard |
| VL-CBR-0812 | 12" 8 pin Nanofit to fork terminal, power cable |
| VL-CBR-0818 | 12" ATX 24-pin to 8-pin Molex Nano-Fit |
| VL-CBR-1604 | Dual Ethernet cable, 16-pin Clik-Mate to 2 RJ-45 – rugged latching, 12" |
| VL-CBR-0702 | SATA cable – rugged latching, 20" |
| VL-CBR-2033 | Mini DisplayPort to HDMI Active Adapter |
| VL-CBR-1014 | RS232 Dual channel cable 2xDsub (9-pin), Latching, 12" |
| VL-HDW-105 | 0.6" Standoff Package, metric thread |
| VL-HDW-401 | Thermal compound paste for optional heat sink attachment |
| Cables and Adapters | |
| VL-CBR-0203 | 2-pin Latching Battery Module, 6" |
| VL-CBR-2031 | miniDisplayPort to miniDisplayPort, 36" |
| VL-CBR-2032 | Mini DisplayPort to VGA Adapter |
| Thermal Options | |
| VL-HDW-424 | Heat sink with fan |
| VL-HDW-425 | Heat pipe adapter kit |
| Miscellaneous | |
| VL-PS-ATX12-300A | ATX development power supply (requires VL-CBR-0818) |

Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, providing expert support during development, or on-time delivery of defect-free products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact VersaLogic today to learn more.

**ISO 9001 • AS9100
CERTIFIED COMPANY**

