


## 8-Slot SOSA™ aligned 3U VPX™ Development System

### Key Features

Vulcan is a ready-to-use solution for customers starting 3U VPX™ projects based on Intel® processor Plug In Cards (PICs).

- Supplied with built in AC power supply, uncommitted backplane, and cooling fans
- 8 slots for processor and peripheral boards
- Fabric connections with the Meritec® VPX3® Cable System
- 100GBASE-KR4 support
- PCIe® Gen 4 support
- Supports 4x conduction-cooled PICs
- Supports 4x air-cooled PICs

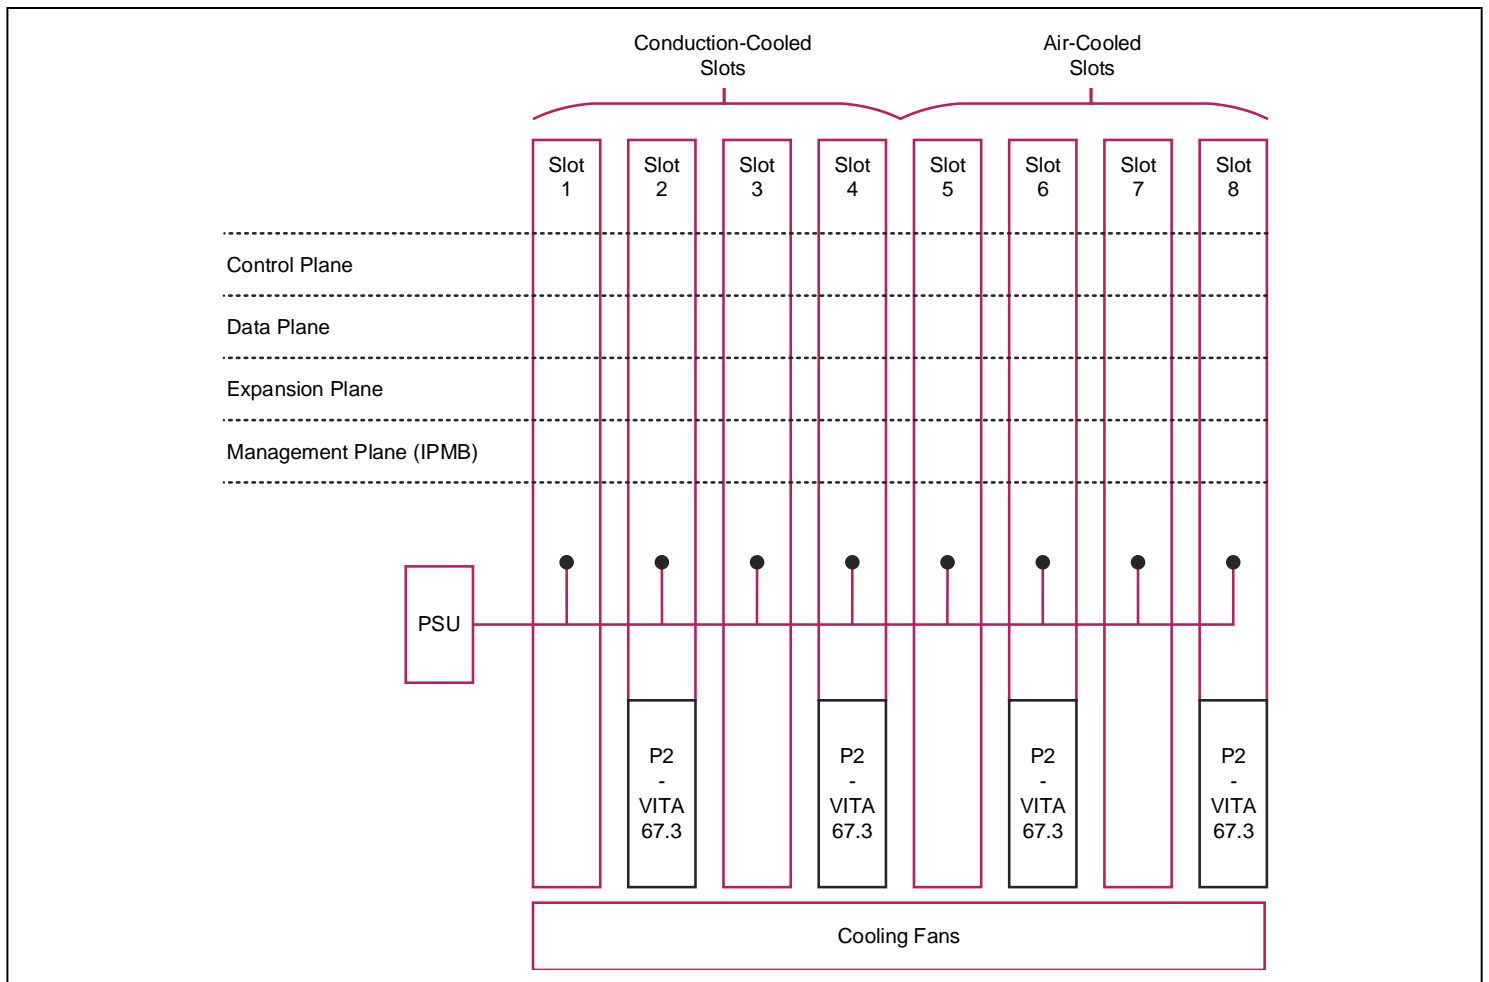

## 3U VPX Development System

- 3U VPX Development System:
  - 8x vertically mounted 3U VPX slots
  - cooling air intake at the front of the system
  - air exhaust at top of the system
  - convenient carrying handle
  - fan speed control knob
- VPX backplane provides:
  - 2x conduction-cooled slots with P2 aperture (VITA 65.0 14.2.16 slots)
  - 2x conduction-cooled slots without P2 aperture (VITA 65.0 14.6.11 slots)
  - 2x air-cooled slots with P2 aperture (VITA 65.0 14.2.16 slots)
  - 2x air-cooled slots without P2 aperture (VITA 65.0 14.6.11 slots)
  - conduction-cooled slots support Meritec VPX3 cable system
  - air-cooled slots support RTM connections
  - capable of 100GBASE-KR4
  - capable of PCIe Gen 4

## Power Supply

- integrated 1200 W modular power supply:
  - +12 V output (100 A max)
  - +3.3 V\_AUX output (37.8 A max)
  - rated power 1200 W
  - AC 90-264 V, 47 Hz to 63 Hz input

## Optional Accessories

- Meritec VPX3 Cables:
  - CB VPX/007-01 (VPX3 6" Odd Fat Pipe Cable)
  - CB VPX/007-02 (VPX3 V65 14.6.11 MP01)
  - CB VPX/007-03 (VPX3 I V65 14.2.16 MP01)
  - CB VPX/007-04 (VPX3 V65 14.2.16 USB)
  - CB VPX/007-05 (VPX3 V65 14.2.16 ETH)
  - CB VPX/007-06 (VPX3 V65 14.2.16 DP)

## Environmental Specification

- operating temperatures:
  - +0°C to +55°C (operating)
  - -40°C to +70°C (non-operating)
- relative humidity, non-condensing:
  - 5% to 95%

## Mechanical Specification

- chassis weight (unpopulated) 9.5 kg (21 lbs)
- 5HP (1.0-inch) backplane slot pitch supports:
  - 0.8-inch and 1.0-inch width boards
  - VITA 48.2 conduction cooled
- chassis dimensions:
  - total chassis height is 6U
  - width 227 mm (9")
  - depth 280 mm (11")